


WHAT IS IT?

GreenWood Handscraped Bamboo is 100% MOSO Bamboo that is harvested from the exclusive Anji Mountain Region of China and carefully selected at the peak of maturity between 5 to 6 years. The core of this product is GreenWood's unique **TruGreen Advantage** core. This core is 100% engineered MOSO bamboo in a cross-fillet format with special "thread" that intertwines each individual fillet. This "thread" allows for slight expansion and contraction in the core as well as increased precision in the manufacturing process. Overall, the **TruGreen** core construction provides the most stable platform on the market while still maintaining its status as 100% Rapidly Renewable Resource.



HANDSCRAPED BAMBOO Fruitwood

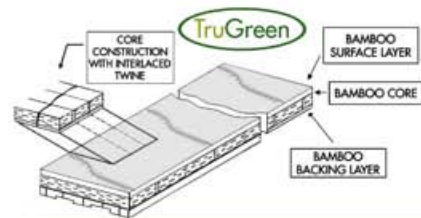

PRODUCT SPECS

- THICKNESS 5/8"
- WIDTH 6"
- LENGTH 72 7/8"
- WEAR LAYER..... 5.0mm
- EDGE Beveled
- CORE..... TruGreen Engineered Bamboo Core

FINISH


Treffert HPC Aluminum Oxide with Scratch Resistant Top Coat

INSTALLATION

Glue, Float or Staple/ Nail



American Red Oak Handscraped Bamboo



*Environmentally Responsible,
Quality Conscience,
Fashion Inspired,
...GreenWood Products*

COLOR VARIATION

Fruitwood Handscraped Bamboo features slight to moderate color variation

GRAIN VARIATION

Fruitwood Handscraped Bamboo features a vertical cut wear layer that produces moderate but consistent grain variation.

COLOR CHANGE

Fruitwood Handscraped Bamboo will experience little to no color change over time. (Stained Product)

HARDNESS

1340 PSI

WARRANTY

Lifetime Structural
30 Year Residential Finish
5 Year Commercial Finish



ENVIRONMENTAL INFORMATION

LEED® CREDITS

MR 6: Rapidly Renewable Materials

GreenWood Bamboo products qualify as MR 6 (Rapidly Renewable Materials) as they are made with 100% MOSO bamboo, a rapidly renewable resource.

EQ 4.4: Low-Emitting Materials

GreenWood Handscraped Bamboo is manufactured with LEED® EQ 4.4-compliant adhesive.

ENVIRONMENTAL IMPACT

Adhesives used in manufacturing of GreenWood products have Zero Added Urea Formaldehyde and comply with standards set by U.S. OSHA, European E0 and CARB (California Air Resource Board) Phase 1 & 2. GreenWood products also feature high quality VOC-free finishes.

GREENWOOD PRODUCTS COMPANY

Toll Free (866) 593-4454 :: EMail info@GreenWoodFlooring.com
www.GreenWoodFlooring.com

